




AVA LED

Transparent P10

P10,42 / P10,42

Data Sheet

QUALITY IN DETAIL

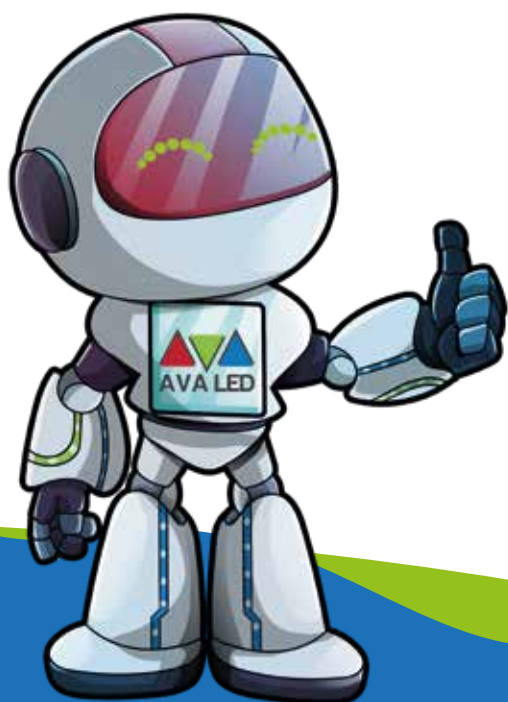

TRANSPARENT LED SCREEN

Indoor Transparent Series

P10,42 / P10,42






TITLE OF CONTENTS

- 02 - 04 ○ Features
- 05 ○ Specification
- 06 - 09 ○ Vision - Products Detail
- 09 ○ Company Info


- * Cabinet Size : 1000x1000mm
- * Transparent Systems
- * Easy and fast instalation
- * A Class LED Chip
- * +14/16 Bit
- * Best Quality Pcs
- * Very thin case structure
- * Very Light Weight
- * Fixed installation outside.
- * Outdoor/indoor wall curtain
- * Screen Brightness
- * support in front of the maintenance and rear maintenance
- * Slim Powersupply

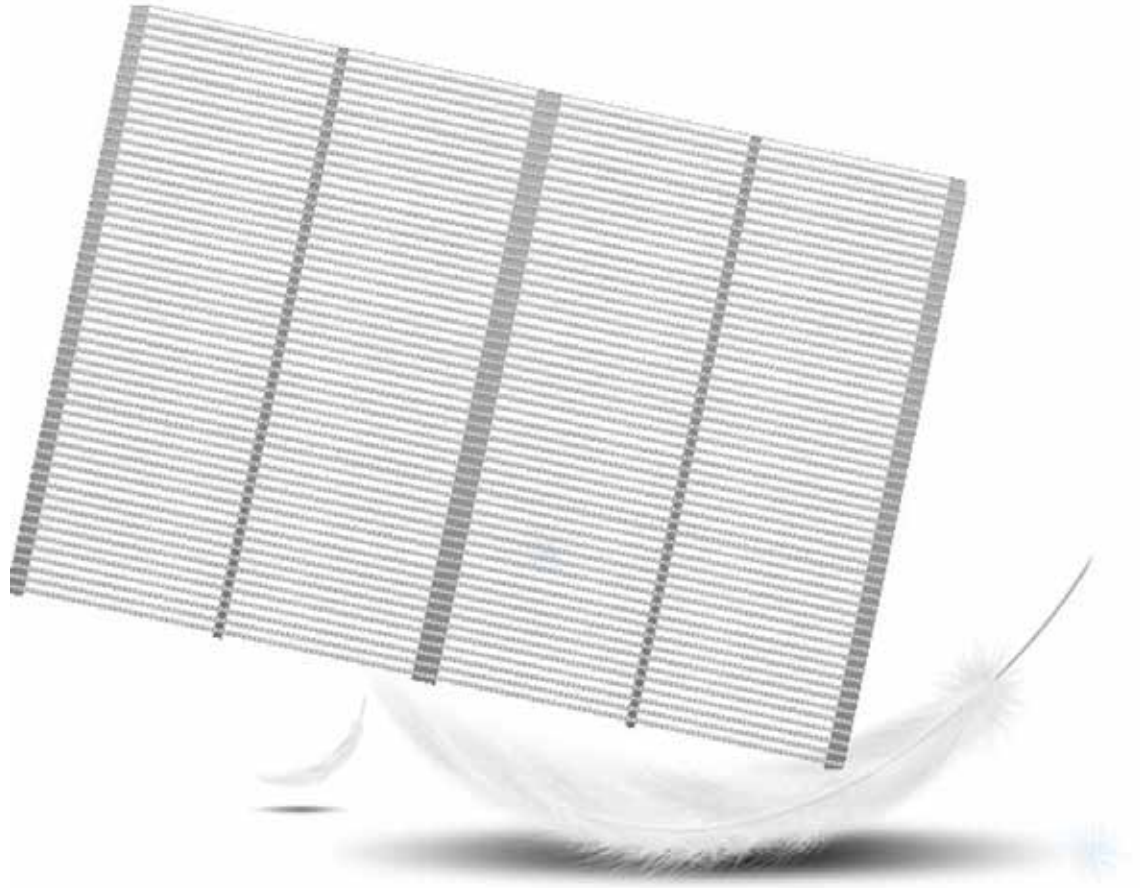

P10,42 / P10,42 Outdoor Transparent Screen

- *** Weight : 9kg
- *** Dimension : 1.000mm x 1.000mm
- *** Front Services
- *** SQM: 9.216 Pixel
- *** Nova Star Controller
- *** SMD3535
- *** High Brightness

FEATURES

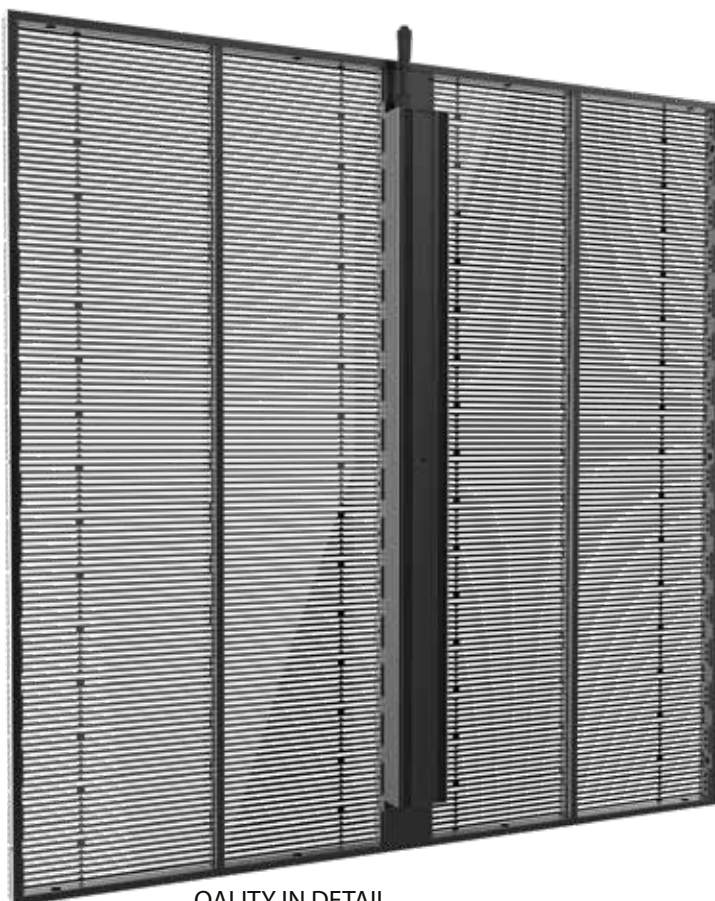



QUALITY IN DETAIL

○ TECHNICAL SPECIFICATION

MODEL NAME	IP 30
Series	Transparent
IP Rating	IP30
Pixel Pitch	h:10,42mm / V:10,42mm
Transparancy	0,8
Pixel Configuration	SMD 3535
LED	Black Shell
Processing	14 Bit
Pixel Density / m2	9216
Resolution/SQM	96 x 96
Cabinet Resolution 1000 x 1000mm	96 x 96
Pixel Density / Cabinet 1.000 x 1000	4608
Module Size (mm)	500 x 125 / 62,5
Cabinet Size (mm)	1000 x 1000 x 80mm
Module Per Cabinet	16 Module
Module Resolution	48 x 24
Weight Per Panel Net kg. 640x1920mm	16
Rotation per 90 Degree	✓
Free Rotation (with R5)	○
Mapping	✓
Clear View	○
Low Latency	○
HDR	○
Power Consumption (w/sqm)	<800W
Power for Playing (w/sqm)	<300W
Driving Method	1/6
Brightness	>4300 Nits
Refresh Rate	>1920Hz
Refresh Rate High Refresh	-
Refresh Quality	Standart Quality
High Refresh (PLL inside)	-
High Refresh Power Saving	-
High Refresh Dynamic Power Saving	-
Driving IC Type	Ordinary
Refrate Quality 2	Standart Quality
No Waterless Ripple of Camera	>%50
Cabinet Material	Aliminum / Iron
Horizontal Viewing Angle	140 (±30)
Vertical Viewing Angle	140 (±30)
Expected LED Lifetime %50	100,000 Hours
IP Rating	IP 30
PCB Quality	Best Quality
Module - Mask Quality	Best Quality
LED Chip	Class A
Picture / Video Quality	Best Quality
Grey Scale	65536
Control Systems	Nova Star
working environment	-20 – +60 (±10)
Voltage Range	200 ~240VAC
Packing include	Plate-Power-Cat5 Cable
Certificate	CE/EMC/LVD-ATR-EUR1 ISO-9001:2015 ISO-14001:2015



The data written in the catalog may differ by + - 15%

PRODUCT PHOTO

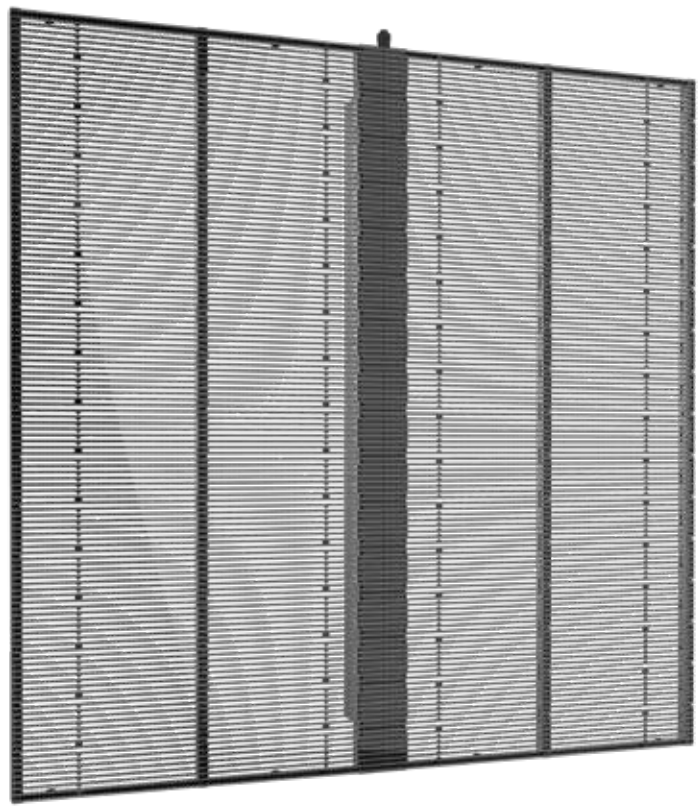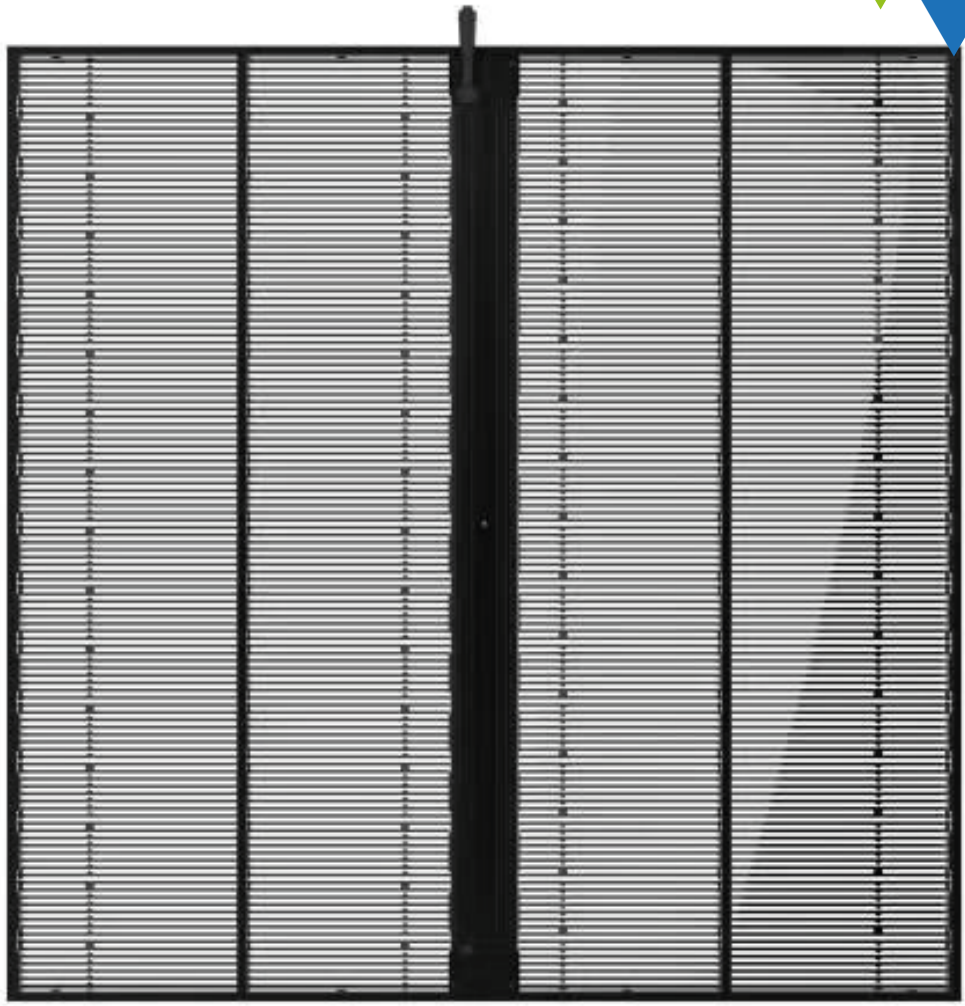

QUALITY IN DETAIL

PRODUCT PHOTO

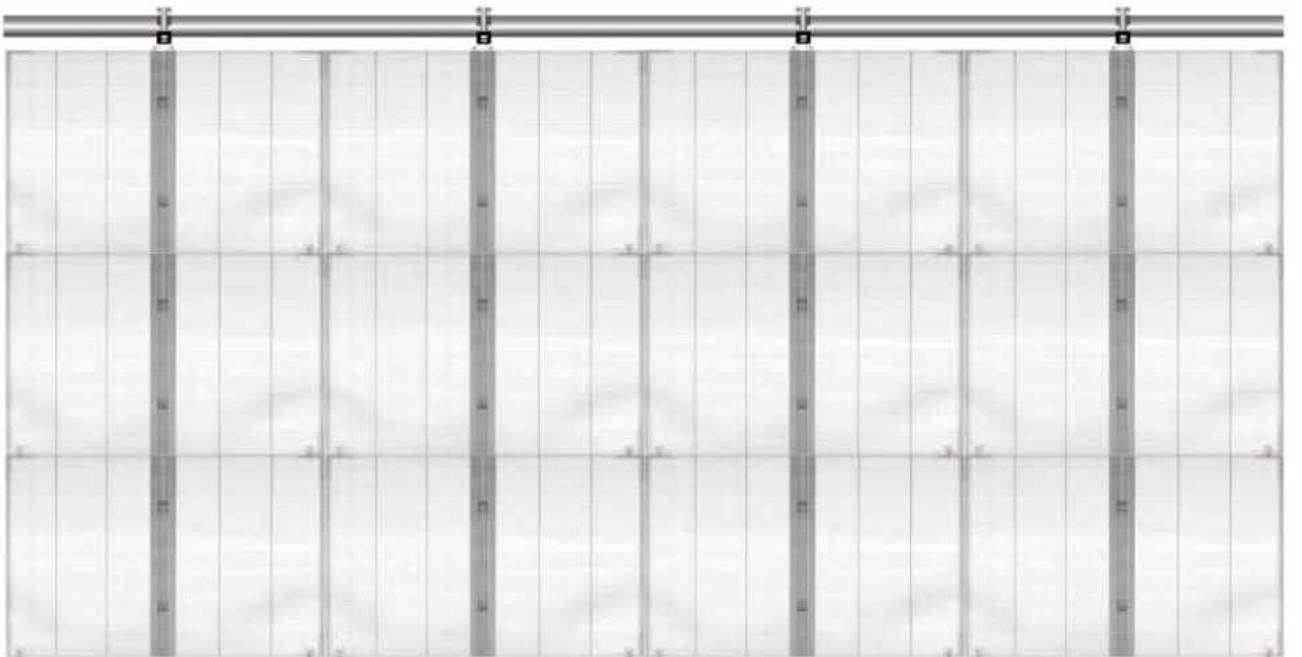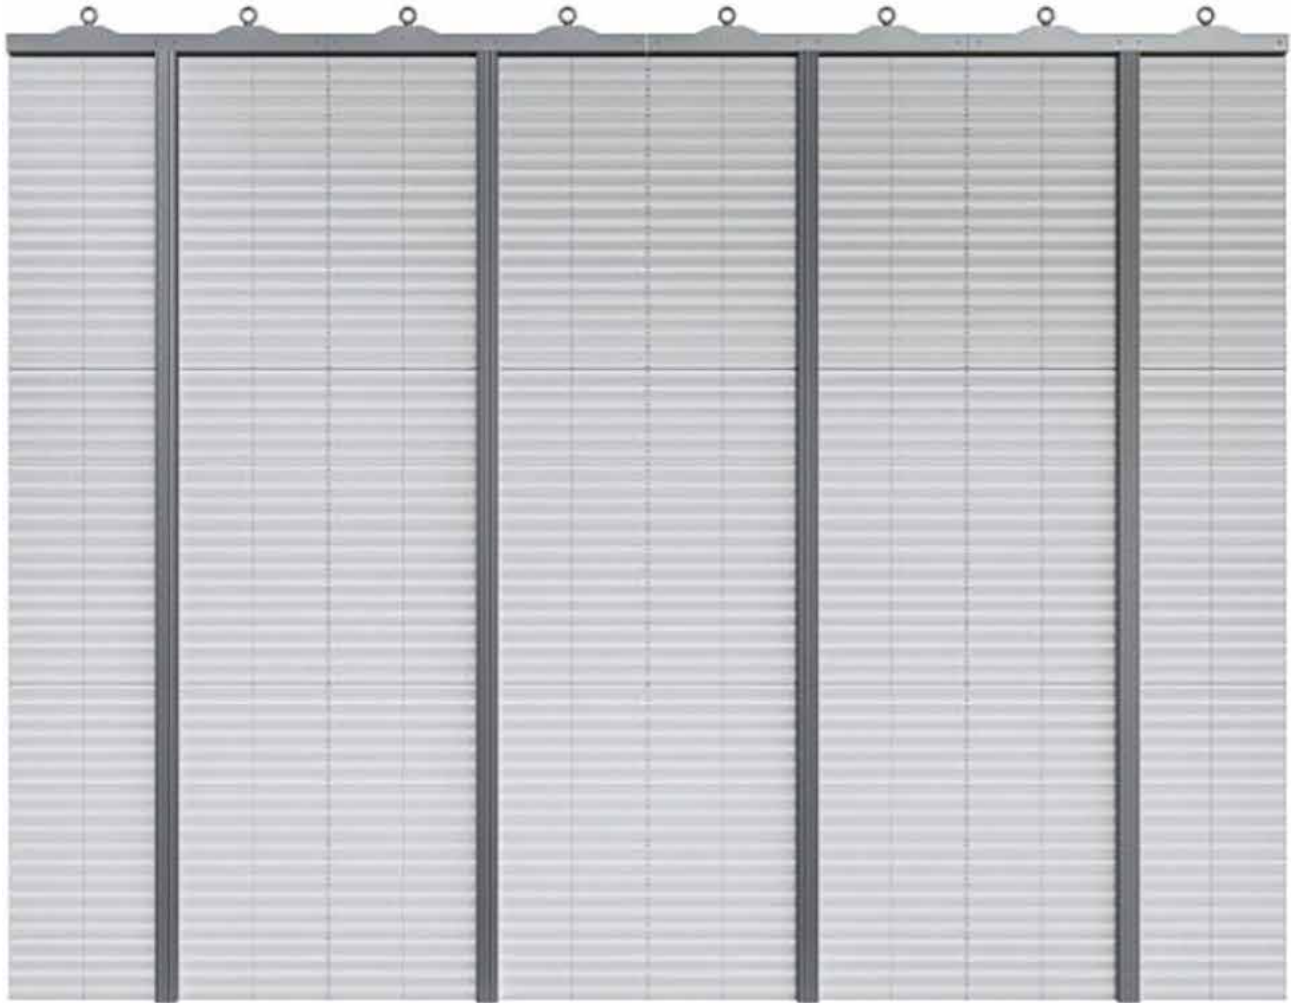

PRODUCT PHOTO



QUALITY IN DETAIL



PRODUCT PHOTO



AVA LED

www.avaledscreen.com
info@avaledscreen.com

AVA GROUP GMBH

Adress: Goethestraße 7D - 40237 Düsseldorf / Germany

Phone : +49 211 730 64 817

